



ASM 1,5 to 10 m³

- Conforms to DIN EN 30720-1
- Tested according to BGR 186-6 „Interchangeable tipping & settling containers“
- Compliant with VDI guideline 2700-17 „Load securing on road vehicles“
- Body and frame completely tightly welded
- Hot-dip galvanized
- Double-sided tunneled single or triple tilt bearing
- Lashing bar and net hooks
- Corners reinforced
- Forged recording taps
- Construction:
 - + Open, asymmetrical
 - + Covered, symmetrical (plastic & steellid)
 - + Open, funnel-shaped
 - + Covered, funnel-shaped
 - + Open, asymmetrical with flap

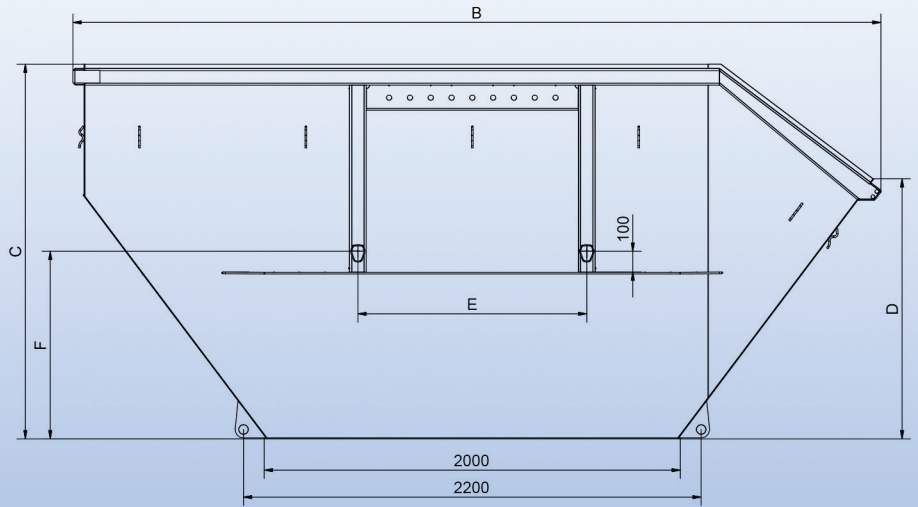

Galvanized Skips ASM 1,5 - 10,0 m³

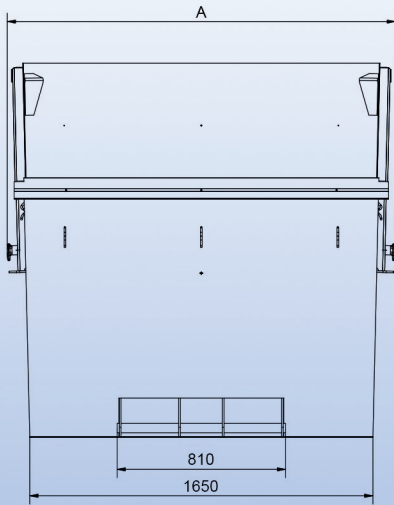

TECHNICAL SPECIFICATIONS

Container Model	Type of construction	Weight in kg	Width A	Length B	Height C	Throw in height D	Spigot spacing E	Spigot height F
ASM 1,5	open, asymmetrical	180	1310	2060	800	540	1100	590
ASM 1,5 T	open, funnel-shaped	205	1315	2070	835	835	1100	705
ASM 2,5	open, asymmetrical	265	1296	2329	1200	750	1100	800
ASM 2,5 T	open, funnel-shaped	268	1300	2430	1220	1220	1100	800
ASM 3,5	open, asymmetrical	340	1284	2665	1500	1000	1100	800
ASM 2,5	Plastic lid, symmetrical	280	1296	2542	1310	800	1100	800
ASM 3,5	Plastic lid, symmetrical	330	1285	2645	1600	1000	1100	800
ASM 5,0 A	open, asymmetrical	620	1865	3340	1250	850	1100	900
ASM 6,0 A	open, asymmetrical	650	1880	3610	1300	1010	1100	900
ASM 7,0 A	open, asymmetrical	740	1865	3620	1500	1000	1100	900
ASM 10,0 A	open, asymmetrical	810	1865	3880	1800	1250	1100	900
ASM 5,0 T	open, funnel-shaped	600	1865	3745	1100	1100	1100	900
ASM 7,0 T	open, funnel-shaped	780	1865	4070	1500	1500	1100	900
ASM 10,0 T	open, funnel-shaped	930	1865	3975	1800	1800	1100	900
ASM 5,0 S	Plastic lid, symmetrical	700	1865	3540	1310	900	1100	900
ASM 7,0 S	Plastic lid, symmetrical	830	1865	3845	1570	1100	1100	900
ASM 10,0 S	Plastic lid, symmetrical	940	1865	3985	2100	1250	1700/1100	1100/900
ASM 5,0 K	Flap, asymmetrical	680	1875	3360	1250	850	1100	900
ASM 7,0 K	Flap, asymmetrical	770	1865	3615	1500	1000	1100	900

Galvanized Skips ASM 1,5 - 10,0 m³